

專業自動洗地機

CT160



清潔劑由刷盤中心
順刷盤轉動平均噴灑
不浪費及污漬牆角



機械性浮動刷盤設計
適宜任何不平整地面清潔
使機器保持最佳清潔效率



V形水刮組設計
集水/吸水效率佳



直覺式簡易操作
符號及符合人體
工學設計



全自動操作功能程式設計：
出水系統/清洗刷/吸水馬達
同步啟動/關閉
吸水馬達延遲關閉設計




清洗刷裝卸/吸水膠片/水管
更新,皆不需使用任何工具



獨特科技設計

TCL微電腦充電器

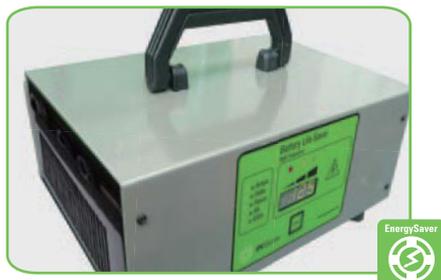

補充式充電設計,有效管理電池使用效能
及延長電池組獨立使用年限

電池組



搭載AGM-EV等級深度放電免保養
電池,可節省保養費用及減低耗損成
本,電池材質採100%可回收物料

清洗程式設定



電腦組模式操作介面：
啟動清洗按鈕,機器各清洗功能即待命
機器依據前進清洗速度自動調整出水量
電腦模組式設定,電池耗能,工作噪音低
自動警示故障,電力及機器操作現況



DOSE清潔劑供應系統：
清潔劑獨立自動與出水
依據比率混合供應，可節
省清潔劑用量，且可輕
易更新清潔劑(選購配件)



特殊防泡沫系統有效保護
●當污水槽水位滿即自動
停止吸水
●清水槽無供應水時即
自動停機



**黃色保養區域指示
及清洗刷毛耗損紅色
指示，使保養更簡便**



**掀背式污水槽設計，可輕易
檢視內部機件，95%乳膠
材質吸水膠片堅固耐用，
特殊設計可四面更替使用**



**搭載雙具齒輪箱清洗
馬達及同軸驅動馬達**

Main technical characteristics

Motors

- **Brush rotation:** independent oil bath motor gear box
- **Brushes pressure:** actuator with pressure adjustment system
- **Suction:** 3 stages with stainless steel fans and shaft
- **Squeegee:** automatic lift during reverse
- **Traction:** motor wheel with parallel axis, 16% climbing rate

Plastics

- **Tanks:** great thickness high density polyethylene
- **Squeegee blades:** made in Latex usable on 4 sides
- **Hoses:** suction and discharge made in high resistance polyurethane
- **Wheels:** oil resistantheel

Other characteristics

- Nylon standard brushes with maximum consumption indicator
- Automatic brush click-on/off
- Electronic solution flow adjustment
- Solution tank discharge hose
- Positioned in height discharge hose with flow adjustment (ø 50 mm)

Mechanics

- **Chassis:** double treatment with galvanizing + die-castinghassi
- **Bearings:** shielded against humidity and water seepages
- **Bolts and nuts:** made in stainless steel where there are water contacts

Electric system

- **Carbon brushes:** easily changeable
- **Boards:** equipped with protective film against water and humidity
- **Solenoid valve:** with Viton membrane resistant against chemical agents
- **Sensors:** solution and recovery water level protected against accidental impacts
- **Display:** digital with hour counter and battery level



Control panel

Brushes, solution and vacuum
inserted by one unique command
or singularly upon necessity

機 型	清洗寬度 (mm)	吸水寬度 (mm)	清洗效率 (㎡/h)	刷盤數量	清水容量 (l)	污水容量 (l)	電力	前/後進 速 度 (Km/h)	淨重 (Kg)	體積 (LxWxH) (cm)
CT160 BT70	700	1010	4690	2	150	170	36V (6x6V)	6.7	353	1720x1010x1360
CT160 BT85	830	1010	5560	2	150	170	36V (6x6V)	6.7	355	1720x1010x1360
CT160 BT95	920	1010	6164	2	150	170	36V (6x6V)	6.7	355	1720x1100x1360

選購配件



權能國際股份有限公司

新北市三重區興德路86號4樓(遠見科技大樓)

電話：02-29957337(代表) 傳真：02-29957031

www.joynice.com.tw

inf@joynice.com.tw