



# CBHD3

輕巧尺寸


輸出功率180W-600W

電流從15A到25A

強化塑料外殼

可獨立或內置機器充電



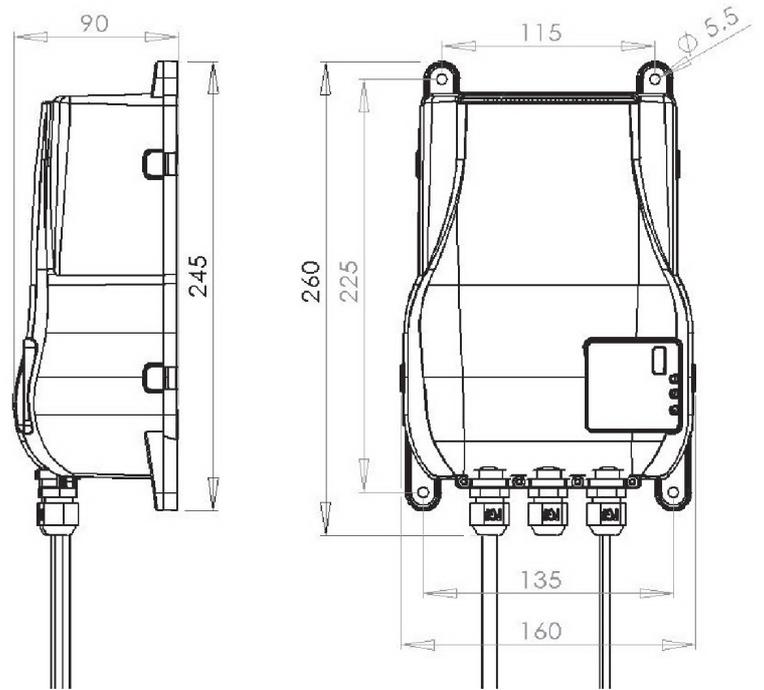

### 功能：

- ▲ IP30防潮等級
- ▲ 採用先進技術的高頻脈充系統
- ▲ 由微電腦處理器控制充電過程
- ▲ 過熱保護遮斷器
- ▲ 緩電流啟動充電
- ▲ 直流電壓(DC)可依需求調整為12V或24V
- ▲ 對充電曲線、電流、電壓可經由開關鍵調整進行編碼
- ▲ 可經由編碼調整後，適用於鉛酸、AGM、GEL和鋰電池(Li-Ion/Li-po)
- ▲ 短路、反極性保護遮斷器
- ▲ LED燈示異常信號
- ▲ 3 LED燈示充電狀態

機型	電池電壓(V)	充電電流(A)	電池系列(Ah/20 hr)	充電時數(hr)
CBHD3	12	15	130 - 180	8 - 12
CBHD3	12	20	150 - 240	7 - 12
CBHD3	12	25	220 - 315	9 - 12
CBHD3	24	15	100 - 180	7 - 12
CBHD3	24	20	150 - 240	7 - 12
CBHD3	24	25	220 - 315	9 - 13

輸入電壓(AC): 100-120V, 50-60Hz

輸電電壓(DC): 12-24V

體積尺寸(LxWxH): 160x245x90 mm

淨重(KG.): 1,90